

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : H01J 29/07	A1	(11) International Publication Number: WO 00/62323 (43) International Publication Date: 19 October 2000 (19.10.00)
<p>(21) International Application Number: PCT/US00/08905</p> <p>(22) International Filing Date: 4 April 2000 (04.04.00)</p> <p>(30) Priority Data: 09/290,322 12 April 1999 (12.04.99) US</p> <p>(71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): THOMSON, Mark, Allen [US/US]; Unit #36, 417 East Frederick Street, Lancaster, PA 17602 (US). GARRITY, Edward, Richard, Jr. [US/US]; 704 McGrann Boulevard, Lancaster, PA 17601 (US). EDWARDS, James, Francis [US/US]; 1829 Rockford Lane, Lancaster, PA 17601 (US).</p> <p>(74) Agents: TRIPOLI, Joseph, S. et al.; Thomson Multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).</p>		<p>(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: COLOR PICTURE TUBE HAVING A LOWER EXPANSION TENSION MASK ATTACHED TO A HIGHER EXPANSION FRAME</p> <p>(57) Abstract</p> <p>The present invention provides an improvement in a color picture tube (10) having a tension mask (24) supported by a support frame (28) mounted within said tube. The mask has a significantly lower coefficient of thermal expansion than the frame. The frame has two substantially parallel cantilevered members (42), each member having a distal edge (48) to which the tension mask is attached. At least one of the distal edges has two sections (50, 52) separated by a gap (54) therebetween. The two sections include an inner section (50) and an outer section (52). The mask is glued to the inner section and is welded to the outer section.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

COLOR PICTURE TUBE HAVING A LOWER EXPANSION TENSION MASK ATTACHED TO A HIGHER EXPANSION FRAME

5 This invention relates to color picture tubes having tension masks, and particularly to a tube having means for connecting a tension mask, that is made of a material having a relatively low coefficient of thermal expansion material, to a support frame, that has a significantly higher coefficient of thermal expansion.

A color picture tube includes an electron gun for generating and directing three
10 electron beams to the screen of the tube. The screen is located on the inner surface of a faceplate of the tube and is made up of an array of elements of three different color emitting phosphors. A color selection electrode, which may be either a shadow mask or a focus mask, is interposed between the gun and the screen to permit each electron beam to strike only the phosphor elements associated with that beam. A shadow mask is a thin sheet of
15 metal, such as steel, that is usually contoured to somewhat parallel the inner surface of the tube faceplate.

One type of color picture tube has a tension mask mounted within a faceplate panel thereof. In order to maintain the tension on the mask, the mask must be attached to a relatively massive support frame. Although such tubes have found wide consumer
20 acceptance, there is still a need for further improvement, to reduce the weight and cost of the mask-frame assemblies in such tubes.

It has been suggested that a lighter frame could be used in a tension mask tube if the required tension on a mask is reduced. One way to reduce the required mask tension is to make the mask from a material having a low coefficient of thermal expansion, such as Invar.
25 However, a mask from such material would require a support frame of a material having a similar coefficient of thermal expansion, to prevent any mismatch of expansions during thermal processing that is required for tube manufacturing, and during tube operation. Because the metal materials that have low coefficients of thermal expansion are relatively expensive, it is relatively costly to make both the mask and frame out of identical or similar
30 low expansion materials. Therefore, it is desirable to use the combination of a lower expansion tension mask with a higher expansion support frame. However, a thermal expansion mismatch between mask and frame often results in mask wrinkles following thermal processing, which may involve temperatures as high as 450°C, such as during frit sealing. One solution to deal with this expansion mismatch is to individually weld each mask
35 strand to the frame. It has been found that such individual welding of the strands of a tension mask to a frame causes the mask strands to become misaligned, when existing roller welders are used.

The present invention addresses a need for a solution to the problem, of attaching a tension mask to a frame, that exists when there is a substantial mismatch in coefficients of thermal expansion between a tension mask and its support frame.

The present invention provides an improvement in a color picture tube having a tension mask supported by a support frame mounted within the tube. The mask has a significantly lower coefficient of thermal expansion than the frame. The frame has two substantially parallel cantilevered members, each member having a distal edge to which the tension mask is attached. At least one of the distal edges has two sections separated by a gap therebetween. The two sections include an inner section and an outer section. The mask is glued to the inner section and is welded to the outer section.

In the drawings:

FIGURE 1 is a side view, partly in axial section, of a color picture tube embodying the invention.

FIGURE 2 is a perspective view of a tension mask-frame assembly.

FIGURE 3 is a partial perspective view of the mask-frame assembly of FIGURE 2.

FIGURES 4 through 7 are side views of a cantilevered flange of the frame of FIGURE 3.

FIGURE 1 shows a color picture tube 10 having a glass envelope 11 comprising a rectangular faceplate panel 12 and a tubular neck 14 connected by a funnel 15. The funnel 15 has an internal conductive coating (not shown) that extends from an anode button 16 toward the panel 12 and to the neck 14. The panel 12 comprises a substantially cylindrical viewing faceplate 18 and a peripheral flange or sidewall 20, which is sealed to the funnel 15 by a glass frit 17. A three-color phosphor screen 22 is carried by the inner surface of the faceplate 18. The screen 22 is a line screen with the phosphor lines arranged in triads, each triad including a phosphor line of each of three colors. A color selection tension mask 24 is removably mounted in predetermined spaced relation to the screen 22. An electron gun 26, shown schematically by dashed lines in FIGURE 1, is centrally mounted within the neck 14 to generate and direct three inline electron beams, a center beam and two side or outer beams, along convergent paths through the mask 24 to the screen 22. The tube 10 is designed to be used with an external magnetic deflection yoke, such as the yoke 30 shown in the neighborhood of the funnel-to-neck junction. When activated, the yoke 30 subjects the three beams to magnetic fields which cause the beams to scan horizontally and vertically in a rectangular raster over the screen 22.

The tension mask 24, as shown in FIGURES 2 and 3, is attached to a peripheral frame 28 that includes two long sides 32 and 34, and two short sides 36 and 38. The two long sides 32 and 34 of the frame parallel a central major axis, X, of the tube; and the two short sides 36 and 38 parallel a central minor axis, Y, of the tube. The tension mask 24 includes an apertured portion that contains a plurality of metal strands 39 having a

multiplicity of elongated slits 41 therebetween that parallel the minor axis of the mask. Each slit 41 extends between the two long sides 32 and 34 of the mask 24.

As shown in greater detail in FIGURE 3, each of the two long sides 32 of the frame 28 includes a rigid section 40 and a compliant member 42 cantilevered from the rigid section. The rigid sections 40 are hollow tubes, and the compliant members 42 are metal plates. The compliant members 42 substantially parallel each other and may vary in height from the center of each section longitudinally to the ends of the sections, to permit the best tension compliance over the mask. Each of the short sides 36 and 38 (not shown) has an L-shaped cross-section upper portion 44 parallel to and separated from a flat bar-shaped lower portion 46.

Each compliant member 42 has a distal edge 48 to which the strands 39 of the tension mask 24 are attached. The distal edge 48 of at least one of the compliant members 42 has two sections 50 and 52 separated by a gap 54 therebetween. The two sections 50 and 52 include an inner section 50 and an outer section 52. The mask 24 is glued to the inner section 50 and is welded to the outer section 52.

FIGURES 4 through 7 illustrate the steps taken to attach the mask 24 to compliant members 42 of the frame 28. First, the mask 24 is stretched between the two compliant members 42, as shown in FIGURE 4. Next, forces F1 are applied to the compliant members 42 to move them slightly together, and glue 56 is applied to seal the mask strands 39 to the inner sections 50 of the compliant members 42, as shown in FIGURE 5. After the glue 56 has dried, the forces F1 are changed to reduced forces F2, other forces F3 are applied to the outsides of the outer sections 52, and the mask strands 39 are attached to the outer sections 52 by welds 58, as shown in FIGURE 6. The sum of the forces F2 and F3 should be such that the joint produced by glue 56 is not substantially moved, while a light tension in the mask is maintained. The generated spring force between the inner and outer sections 50 and 52 should be similar to the desired final mask tension. Once the mask is welded, a border 60 of the mask 24 is trimmed, and the forces F2 and F3 are released from the frame, as shown in FIGURE 7. Utilization of this two-attachment process ensures that the positions of the strands are maintained by the glue when the welds are made.

To achieve the proper tension forces in the mask 24 along the entire length of the compliant members 42 requires either that the forces F3 on the outer sections 52 of the cantilevered compliant members 42 be varied along the mask, or that the spring constant of the outer sections 52 be varied along the compliant members 42. This latter technique of varying the spring constant can be achieved in many different ways. For example, the thickness of the outer section 52 can be varied either by machining, by moving the position of the gap 54, or by varying the depth of the gap 54.

Utilization of a tube design that allows for two step attachment of a tension mask permits attachment of individual strands of a tension mask, while preventing misalignment of

the strands relative to a mask frame. This advantage is achieved because the first step of gluing the strands 39 to the inner sections 50 holds the strands in place until they can be welded to the outer sections 52.



In one preferred embodiment, the rigid sections 40 of the long side members 32 and 5 34 are hollow square tubes of 4130 steel having a wall thickness of 0.175 cm. The thickness of the compliant members is determined by considering mask thickness, the flexibility of the total mask-frame assembly and the desired warp misregistration limits. In a further preferred embodiment, the compliant members 42 are plates of 4130 stainless steel that are 0.157 cm thick. The two L-shaped upper portions 44 are preferably of CRS-1018 steel having a 10 thickness of 0.318 cm. The two bar-shaped lower portions 46 are preferably of 300 Series stainless steel having a thickness of about 3 cm, which has a different coefficient of thermal expansion than does the CRS-1018 steel of the upper portions 44. When the frame 28 is heated, the lower portions 46 expand more than do the upper portions 44.

Although the rigid sections 40 have been shown as hollow square tubes, other 15 preferred configurations, such as those having L-shaped, C-shaped or triangular-shaped cross-sections, are also possible for these sections. Furthermore, although the short sides 36 and 38 of the frame 28 have been shown as having L-shaped cross-sections, other preferred configurations may be used, such as C-shaped, triangular shaped or box-shaped.

CLAIMS

1. A color picture tube (10) having a tension mask (24) supported by a support frame (28) mounted within said tube, comprising
said mask having a significantly lower coefficient of thermal expansion than said
5 frame,
said frame having two substantially parallel cantilevered members (42), each member having a distal edge (48) to which said tension mask is attached,
at least one of said distal edges having two sections (50, 52) separated by a gap (54) therebetween, said two sections including an inner section (50) and an outer section (52), and
10 said mask being glued to said inner section and being welded to said outer section.
2. The color picture tube (10) as defined in claim 1, wherein said mask (24) is made from Invar and said frame (28) is made from steel.
- 15 3. The color picture tube (10) as defined in claim 1, wherein the spring constant of said outer section (52) varies along the length of said distal edges (48).
4. The color picture tube (10) as defined in claim 1, wherein the depth of said gap (54) varies along the length of said distal edges (48).
20
5. The color picture tube (10) as defined in claim 1, wherein the width of said outer section (52) varies along the length of said distal edges (48).

1/3

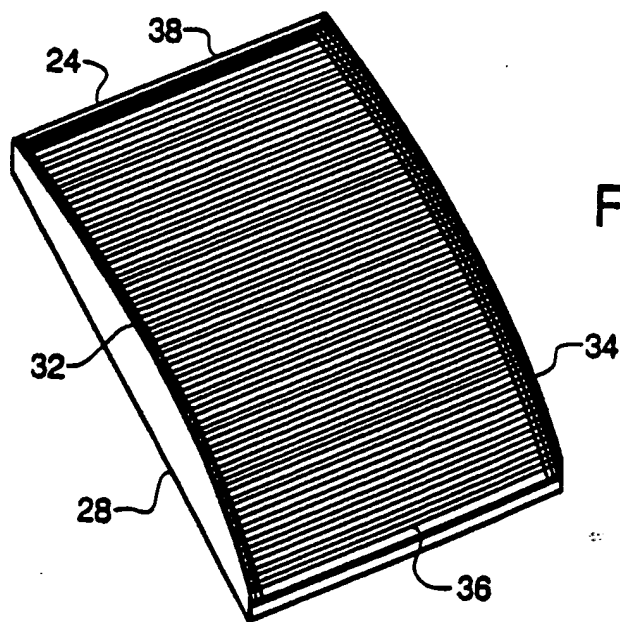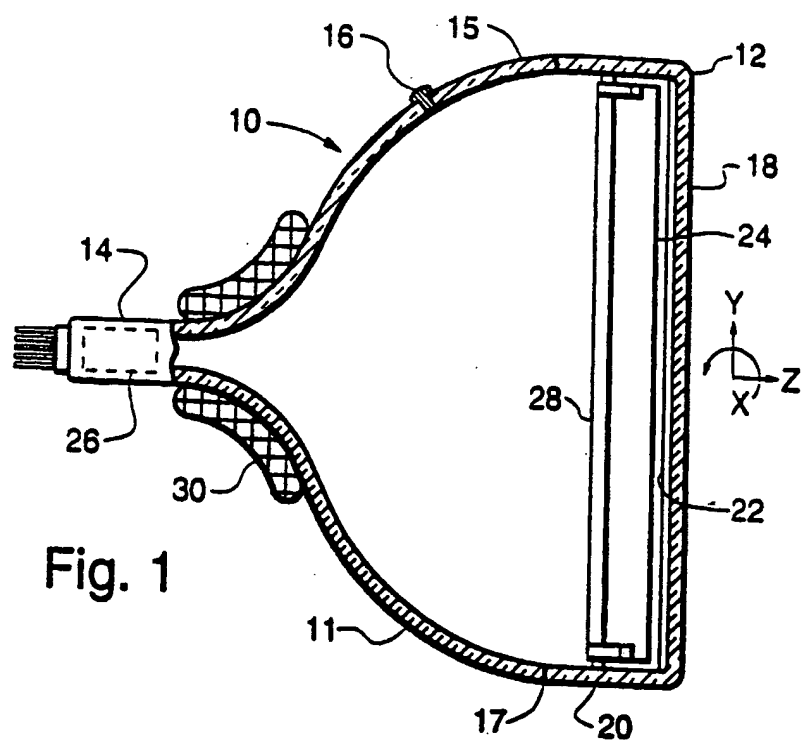

2/3

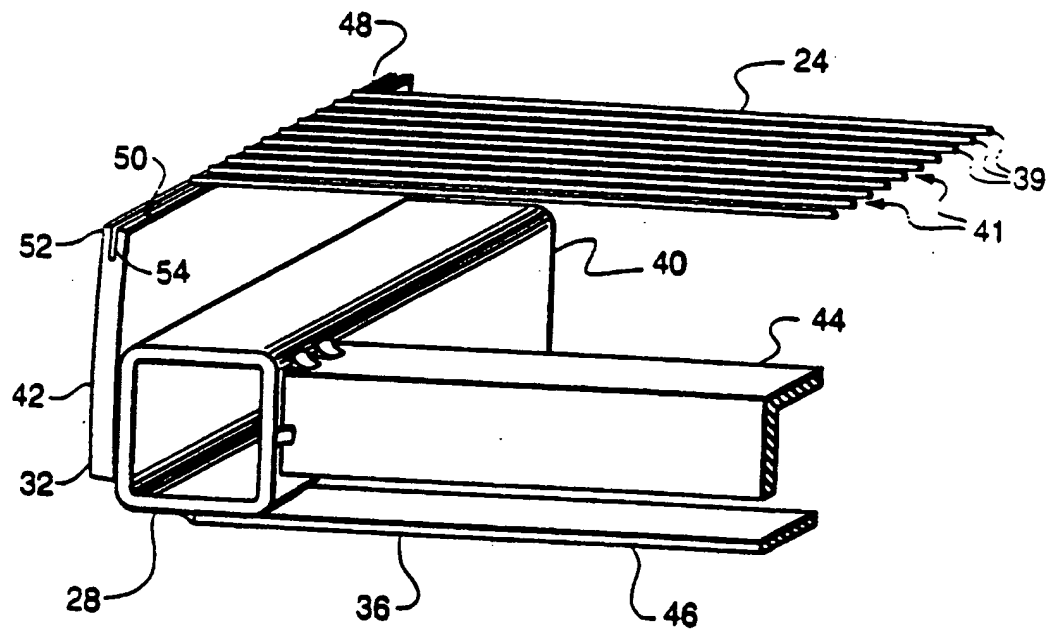


Fig. 3

3/3

Fig. 4

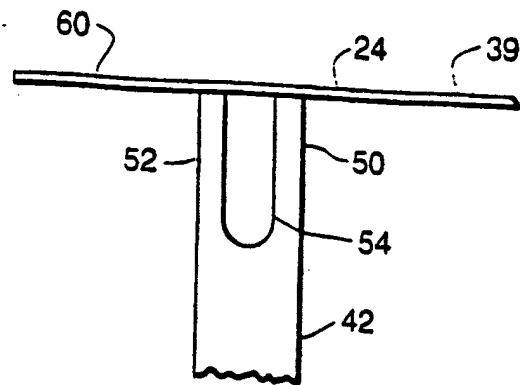


Fig.5

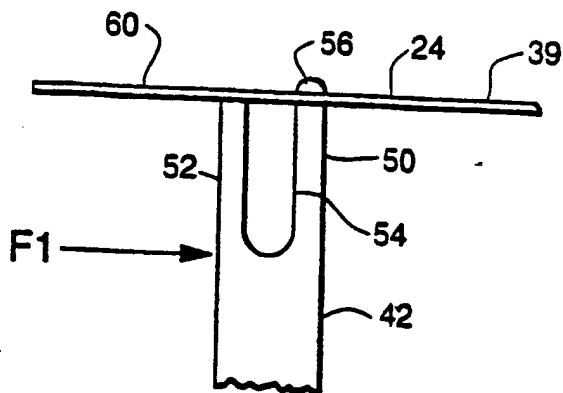


Fig.6


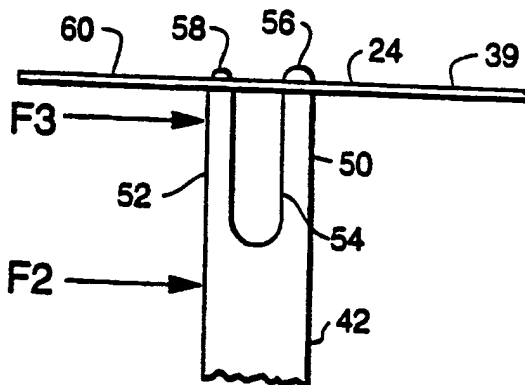


Fig.7

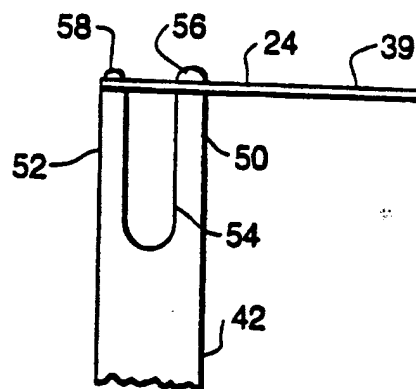

INTERNATIONAL SEARCH REPORT

International Application No

PC/US 96/11599

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01J29/07 H01J29/81

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 197 482 (DER KINDEREN ANTONIUS J ET AL) 8 April 1980 see claims 1,2 ---	1
A	US,A,4 470 822 (BLOOM STANLEY ET AL) 11 September 1984 see claims 12-15 ---	1
A	EP,A,0 431 657 (PHILIPS NV) 12 June 1991 see claims 1-3 ---	1
A	US,A,5 041 756 (FAIRBANKS DAVID W) 20 August 1991 ---	
A	US,A,4 164 059 (VAN ESDONK JOHANNES) 14 August 1979 ---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

18 September 1996

Date of mailing of the international search report

16.10.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van den Bulcke, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 96/11599

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 650 435 (TAMUTUS DONALD J) 17 March 1987 cited in the application ---	
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 135 (E-252), 22 June 1984 & JP,A,59 044752 (SONY KK), 13 March 1984, see abstract -----	